


# 2 SHEAVES OVERHEAD TRAVELLING CRANE




|                        |   |   |
|------------------------|---|---|
| Safety factor          | : | 4 times                                       |
| Finish                 | : | Painted                                       |
| Temperature Range      | : | -20°C up to +200°C<br>(-40°C on request)      |
| Standard Certification | : | Certificate of Conformity<br>Hook certificate |



 Several options for painting according ISO 12944 on request.

Proof Load Certificate on request.

**Non-standard sizes or custom products available on request.**

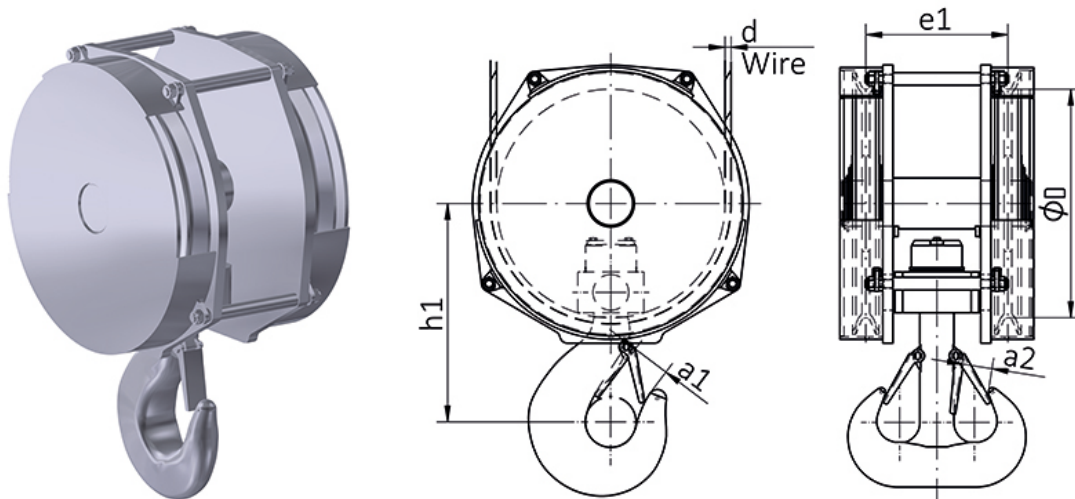

| SWL Tons | Hook size | d Wire | ØD  | h1  | a1  | a2 | e1  |
|----------|-----------|--------|-----|-----|-----|----|-----|
| (1 Bm)   | P         | mm     |     |     |     |    |     |
| 12       | 5         | 11     | 230 | 330 | 59  | 38 | 175 |
| 16       | 6         | 12-13  | 250 | 390 | 69  | 48 | 180 |
| 20       | 8         | 14-15  | 315 | 430 | 76  | 47 | 190 |
| 25       | 10        | 16-17  | 355 | 470 | 84  | 57 | 230 |
| 32       | 12        | 18     | 355 | 530 | 97  | 60 | 240 |
| 40       | 16        | 19-20  | 400 | 600 | 110 | 63 | 300 |
| 50       | 20        | 21-22  | 500 | 650 | 132 | 73 | 360 |