

HD TURNBUCKLE EYE JAW




Material	:	High tensile steel
Safety Factor	:	5 times
Finish	:	Painted RAL 5013
Temperature Range	:	-20°C up to +200°C
Standard Certification	:	Certificate of Conformity

This type of rigging screw meets the requirement as laid down in the Dutch, British, American and other dock regulations. Deliverable with two securing nuts or plates upon request. Custom design screws can be constructed in any size and capacity. Rigging screws are supplied with trapezium thread.

Proof Load Certificate on request.

Non-standard sizes or custom products available on request.

Standard supplied with two securing nuts. This type of rigging screw meets the requirements as laid down in the Dutch, British, American and other Dock regulations.

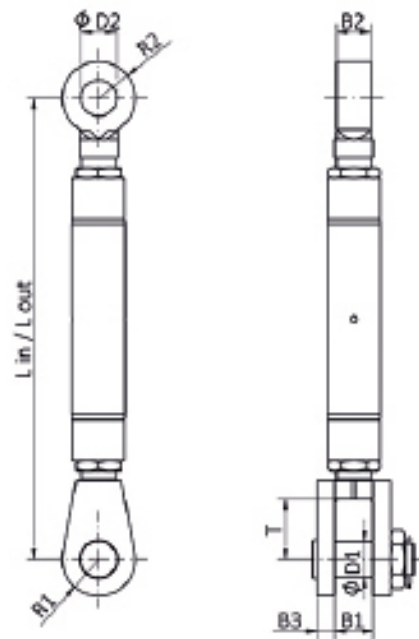

Trap.	Article number	SWL		L IN	L OUT	B1 (mm)	B3 (mm)	T (mm)	D1 (mm)	R1 (mm)	B2 (mm)	R2 (mm)	D2 (mm)
		tons	kN										
mm	Painted RAL 5013 blue	Jaw											
		Stud Eye											
55 x 8	HDRS013.5EJ	13,5	133	890	1215	55	20	120	51	60	50	60	53
65 x 8	HDRS017EJ	17	176	965	1315	65	28	130	63	70	55	70	65
70 x 8	HDRS025EJ	25	245	1030	1360	76	30	145	70	70	70	70	72
75 x 8	HDRS030EJ	30	294	1090	1460	80	35	160	72	75	70	75	74
80 x 8	HDRS035EJ	35	343	1175	1575	90	40	175	80	85	80	85	82
90 x 8	HDRS045EJ	45	442	1235	1715	100	45	175	90	95	90	95	93
100 x 8	HDRS055EJ	55	540	1325	1835	110	50	175	100	105	100	105	103
110 x 8	HDRS070EJ	70	687	1435	1985	110	55	175	108	115	100	115	111
120 x 8	HDRS085EJ	85	834	1540	2175	130	75	175	127	135	120	135	130
130 x 8	HDRS100EJ	100	981	1615	2345	140	90	175	140	145	130	145	143
140 x 8	HDRS120EJ	120	1177	1740	2335	155	90	190	152	170	140	170	155
160 x 8	HDRS160EJ	160	1570	1865	2465	170	100	210	178	190	160	190	181
180 x 8	HDRS200EJ	200	1962	2010	2630	190	110	250	190	220	170	200	193
200 x 8	HDRS250EJ	250	2453	2190	2860	210	120	280	250	260	190	260	253