


# STANDARD REEVE BLOCK 3 SHEAVES





Safety Factor	:	4 times
Finish	:	Painted
Temperature Range	:	-20 °C up to +200 °C (-40 °C on request)
Standard Certification	:	Certificate of Conformity Hook Certificate



 Several options for painting according ISO 12944 on request.

Proof Load Certificate on request.

**Non-standard sizes or custom products available on request.**

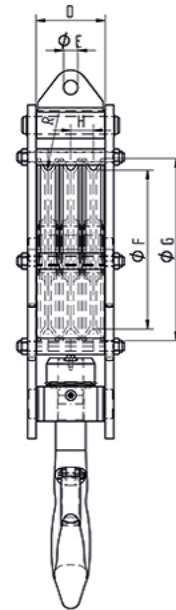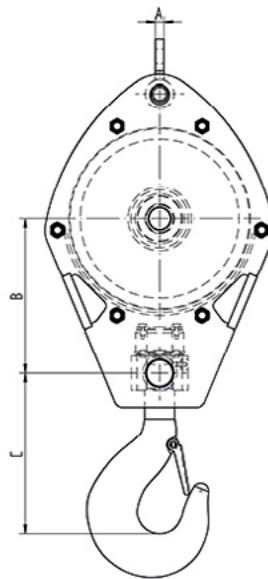

SWL	Wire	ØF	G	Weight
tons	mm	mm	mm	kg ±
15	10	230	250	120
20	11/12	250	285	150
25	13/14	285	325	200
32	15/16	315	360	280
40	17/18	355	410	400
50	19/20	400	460	500
63	21/22	450	515	600
80	23/26	520	590	700
100	27/30	560	630	800
120	31/35	630	720	1000
150	36	720	810	1250