

# HEAVY TYPE SNATCH BLOCK



Material	:	Mild steel
Safety Factor	:	4 times
Finish	:	Painted
Temperature Range	:	-20 °C up to +180 °C
Standard Certification	:	Certificate of Conformity Proofload Certificate




Sheaves with roller bearing on request.



Groove size can be modified on request for customized rope sizes.



Available with shackle

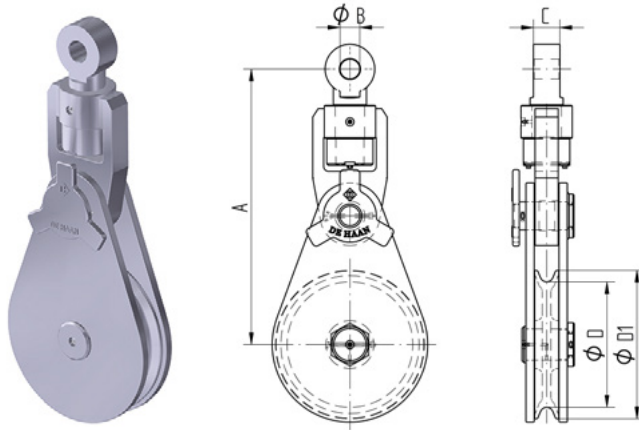

Type	SWL	Rope size	Line pull	Suitable for Shackle	A	ØB	C	ØD	ØD1	Weight
	tons	mm	tons		mm					kg ±
H43106	17	22 - 25	8.5	17	490	44	57	110	150	49
H43108	25	25 - 28	12.5	25	602	53	70	150	200	78
H43110	25	28 - 32	12.5	25	632	53	70	190	250	92
H43112	25	28 - 32	12.5	25	662	53	70	240	300	112
H43114	25	28 - 32	12.5	25	692	53	70	290	350	127
H43118	35	32 - 38	17.5	35	835	60	80	380	450	213
H43120	35	32 - 38	17.5	35	865	60	80	430	500	243
H43124	35	32 - 38	17.5	35	925	60	80	535	605	308
H43224	55	38 - 42	27.5	55	1040	73	100	520	605	449
H43230	85	44 - 48	42.5	85	1212	85	120	630	750	938
H43234	120	50 - 55	60	120	1327	100	140	740	860	1319
H43236	150	60 - 70	75	150	1427	113	160	760	910	1600
H43242	200	75 - 85	100	200	1630	135	170	870	1060	2285
H43246	250	88 - 93	125	250	1785	145	190	970	1170	3015