


1 SHEAVE OVERHEAD TRAVELLING CRANE





Safety Factor	:	4 times
Finish	:	Painted
Temperature Range	:	-20 °C up to +180 °C (-40 °C on request)
Standard Certification	:	Certificate of Conformity Hook Certificate



 Several options for painting according to ISO 12944 on request.

Proof Load Certificate on request.

Non-standard sizes or custom products available on request.

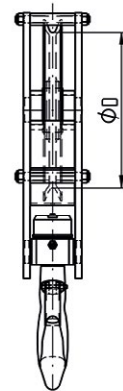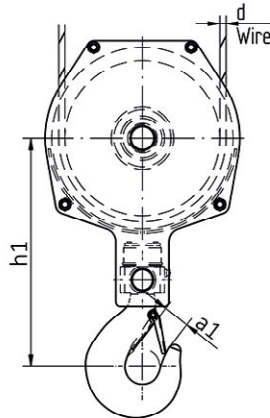

SWL Tons (1 Bm)	Hook size P	d Wire	ØD	h1	a1
mm					
5	2,5	9-11	210	380	41
8	4	12-13	250	435	49
10	5	14-15	315	490	55
12	6	16-17	355	570	59
16	6	18	355	570	59
20	8	19-20	400	630	69
25	10	21-22	500	715	76