
CR ROPE SWIVEL

Material	:	Alloy steel quenched and tempered
Working Load Limit	:	20% of the MBL
Finish	:	Painted
Temperature Range	:	-4F up to 392F
Standard Certification	:	Certificate of Conformity

ISO 12944 coating on request.

Non-standard sizes or custom products available on request.



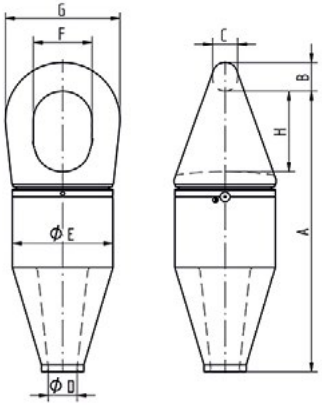

Size	Rope dia.	Article number	MBL	A	B	C	D	E	F	G	H	Weight
inches	inch	painted	USt	inch								lbs
2	1 ⅝ - 2 ⅛	CR-ROPE2	275,6	25	2 7/32	2	2 7/32	8 23/32	4 ½	8 23/32	6 ½	257,9
2 ¼	2 ¼ - 2 ⅜	CR-ROPE2 ¼	330,7	27 7/32	2 ⅝	2 7/32	2 ½	9 7/16	5 5/16	9 ⅛	7 23/32	304,2
2 ½	2 ½ - 2 ¾	CR-ROPE2 ½	440,9	28 5/16	3	2 ⅝	3	9 13/16	5 29/32	10 ⅝	8 ⅛	363,8
3	3 - 3 ⅛	CR-ROPE3	661,4	32 29/32	3 5/16	3	3 7/16	11 13/16	6 29/32	13 ½	9 7/16	540,1
3 ½	3 ½ - 3 ⅝	CR-ROPE3 ½	881,8	38	4 ⅛	3 23/32	4	13	8 ⅛	14 7/32	11 7/32	760,6
4	3 ¾ - 4 ¼	CR-ROPE4	992,1	41 23/32	4 5/16	3 29/32	4 5/16	14 7/16	8 29/32	15	12 ⅝	1069,2