
CR ROPE SWIVEL

Material	:	Alloy steel quenched and tempered
Working Load Limit	:	20% of the MBL
Finish	:	Painted
Temperature Range	:	-20°C up to +200°C
Standard Certification	:	Certificate of Conformity

ISO 12944 coating on request.

Non-standard sizes or custom products available on request.



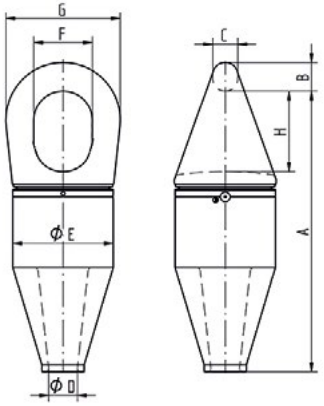

Size	Rope dia.	Article number	MBL	A	B	C	D	E	F	G	H	Weight
inches	mm	painted	tons	mm								kg ±
2	40 - 54	CR-ROPE2	250	635	55	50	57	220	115	220	165	117
2 ¼	55 - 60	CR-ROPE2¼	300	690	65	57	63	238	135	230	195	138
2 ½	61 - 72	CR-ROPE2½	400	720	75	65	75	250	150	270	205	165
3	73 - 84	CR-ROPE3	600	835	85	75	86	300	175	342	240	245
3 ½	85 - 93	CR-ROPE3½	800	965	105	95	101	330	205	360	285	345
4	94 - 105	CR-ROPE4	900	1060	110	100	108	365	225	380	320	485