

Material	:	High tensile steel
Safety Factor	:	5 times
Finish	:	Painted RAL 5013
Temperature Range	:	-4°F up to 356°F
Standard Certification	:	Certificate of Conformity

This type of rigging screw meets the requirement as laid down in the Dutch, British, American and other dock regulations. Deliverable with two securing nuts or plates upon request. Custom design screws can be constructed in any size and capacity. Rigging screws are supplied with trapezium thread.


Proof Load Certificate on request.

Non-standard sizes or custom products available on request.

Only with additional locking device suitable for lifting.

(On request available)

Standard supplied with two securing nuts. This type of rigging screw meets the requirements as laid down in the Dutch, British, American and other Dock regulations.

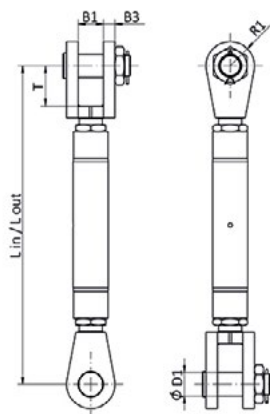

Trap.	Article number	SWL		L IN	L OUT	B1	B3	T	ØD1	R1
inch	Painted RAL 5013 blue	USt	kN	inch		Double Lug (inch)				
2 1/8 x 1/8	HDRS013,5JJ	14,9	133	36 13/16	49 9/8	2 7/32	1 1/16	4 23/32	2	2 7/16
2 1/2 x 1/8	HDRS017JJ	18,7	167	39 13/16	53 1/2	2 1/2	1 1/8	5 1/8	2 1/2	2 13/16
2 3/4 x 1/8	HDRS025JJ	27,6	245	42 23/32	55 23/32	3	1 7/32	5 23/32	2 13/16	2 13/16
3 x 1/8	HDRS030JJ	33,1	294	45 23/32	60 7/32	3 1/8	1 7/16	6 1/16	2 13/16	3
3 1/2 x 1/8	HDRS035JJ	38,6	343	49 7/32	65	3 1/2	1 1/8	6 29/32	3 1/8	3 5/16
3 1/2 x 1/8	HDRS045JJ	49,6	442	51 7/32	70 1/8	3 29/32	1 13/16	6 29/32	3 1/2	3 23/32
4 x 1/8	HDRS055JJ	60,6	540	54 5/16	74 7/16	4 1/16	2	6 29/32	3 29/32	4 1/8
4 1/2 x 1/8	HDRS070JJ	77,2	687	58 7/10	79 23/32	4 1/16	2 7/32	6 29/32	4 1/16	4 1/2
4 3/4 x 1/8	HDRS085JJ	93,7	834	61 1/8	86 1/8	5 1/8	3	6 29/32	5	5 1/16
5 1/8 x 1/8	HDRS100JJ	110,2	981	64 7/32	92 29/32	5 1/2	3 1/2	6 29/32	5 1/2	5 29/32
5 1/2 x 1/8	HDRS120JJ	132,3	1177	68 23/32	92 1/8	6 1/8	3 1/2	7 1/2	6	6 29/32
6 1/2 x 1/8	HDRS160JJ	176,4	1570	73 3/8	97 7/32	6 29/32	3 29/32	8 1/16	7	7 1/2
7 1/10 x 1/8	HDRS200JJ	220,5	1962	79 1/2	103 29/32	7 1/2	4 1/16	9 13/16	7 1/2	8 29/32
7 3/8 x 1/8	HDRS250JJ	275,6	2453	85 7/16	111 13/16	8 35/16	4 23/32	11	9 13/16	10 7/32