

# HD TURNBUCKLE EYE EYE




Material	:	High tensile steel
Safety Factor	:	5 times
Finish	:	Painted RAL 5013
Temperature Range	:	-20 °C up to +180 °C
Standard Certification	:	Certificate of Conformity

This type of rigging screw meets the requirement as laid down in the Dutch, British, American and other dock regulations. Deliverable with two securing nuts or plates upon request. Custom design screws can be constructed in any size and capacity. Rigging screws are supplied with trapezium thread.

Proof Load Certificate on request.

**Non-standard sizes or custom products available on request.**

Standard supplied with two securing nuts. This type of rigging screw meets the requirements as laid down in the Dutch, British, American and other Dock regulations.

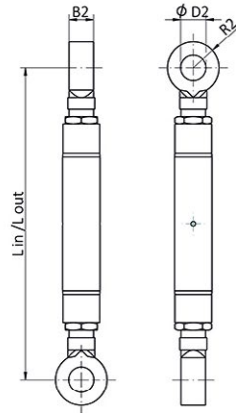

Trap.	Article number	SWL		L IN	L OUT	B2 (mm)	R2 (mm)	ØD2 (mm)
		tons	kN					
mm	Painted RAL 5013 blue			mm		Stud Eye		
55 x 8	HDRS013,5EE	13,5	133	840	1165	50	60	53
65 x 8	HDRS017EE	17	167	920	1270	55	70	65
70 x 8	HDRS025EE	25	245	975	1305	70	70	72
75 x 8	HDRS030EE	30	294	1020	1390	70	75	74
80 x 8	HDRS035EE	35	343	1100	1500	80	85	82
90 x 8	HDRS045EE	45	442	1170	1650	90	95	93
100 x 8	HDRS055EE	55	540	1270	1780	100	105	103
110 x 8	HDRS070EE	70	687	1390	1940	100	115	111
120 x 8	HDRS085EE	85	834	1515	2150	125	135	130
130 x 8	HDRS100EE	100	981	1600	2330	125	145	143
140 x 8	HDRS120EE	120	1177	1735	2330	140	170	155
160 x 8	HDRS160EE	160	1570	1860	2460	160	190	181
180 x 8	HDRS200EE	200	1962	2000	2620	170	200	193
200 x 8	HDRS250EE	250	2453	2210	2880	190	260	253