



OPEN SPELTER SOCKET WITH PIN

Material	:	Cast steel
Working Load Limit	:	20% of the MBL
Finish	:	Painted or galvanised (< Type No. 100 standard galvanised)
Temperature Range	:	-40°F up to 392°F
Standard Certification	:	Certificate of Conformity 3.1 material certificate EN 10204

TYPE APPROVED PRODUCT




Sockets are Type Approved by DNV according DNV ST-0378



These sockets include our non-rotating system (NRS-system) which prevents the tump from turning or slipping out of the cone and guarantees a high performance connection.

Non-standard sizes or custom products available on request.

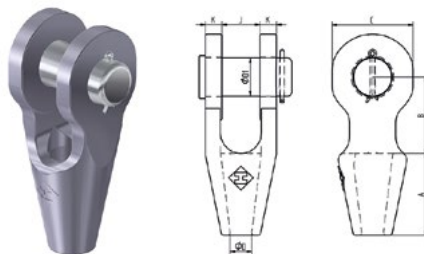

NR.	Rope Ø	Article number		MBL	A	B	C	ØD	ØD1	J	K	Weight
	Inch	painteds RAL 5013 blue	galvanised									
192	¼	-	OSSP192G	8,8	2	1 ⅛	1 ⅛	⅝	2 ⅜	2 ⅜	⅝	0,9
194	⅜ - ½	-	OSSP194G	13,2	2 ⅜	1 ⅜	1 ⅛	7/16	1 ⅜	1 ⅜	7/16	1,8
196	7/16 - ½	-	OSSP196G	22,0	2 ½	2	1 23/32	⅝	1	1	½	2,9
198	⅝ - ¾	-	OSSP198G	33,1	3	2 ½	2 7/16	23/32	1 7/32	1 ⅝	⅝	5,1
100	¾	OSSP100P	OSSP100G	44,1	3 ½	3	3 29/32	1 ⅝	1 7/16	1 ½	⅝	7,1
104	¾	OSSP104P	OSSP104G	66,1	4	3 ½	3 7/16	23/32	1 ⅝	1 23/32	23/32	11,0
108	1	OSSP108P	OSSP108G	82,7	4 ½	4	4 ½	1 ⅝	2	2	23/32	19,4
111	1 ⅛	OSSP111P	OSSP111G	110,2	5	4 ½	4 29/32	1 ⅝	2 7/32	2 7/32	1	25,6
115	1 ¼ - 1 ⅝	OSSP115P	OSSP115G	137,8	5 ½	5	5 ⅝	1 ½	2 ½	2 ½	1 ⅝	35,9
118	1 ½	OSSP118P	OSSP118G	165,3	6	6 7/16	6	1 ⅝	2 13/16	3	1 7/32	51,8
120	1 ⅝	OSSP120P	OSSP120G	198,4	6 ½	6 ½	6 ⅝	1 23/32	3	3	1 ⅝	63,9
125	1 ¾ - 1 ⅞	OSSP125P	OSSP125G	253,5	7 ½	7	7 ½	2	3 ½	3 ½	1 ½	99,2
128	2 - 2 ⅛	OSSP128P	OSSP128G	308,6	8 ½	9	8 ⅝	2 ½	3 ⅝	4	1 13/16	142,2
130	2 ¼ - 2 ⅝	OSSP130P	OSSP130G	413,4	9	10	8 29/32	2 ½	4 ⅝	4 7/16	2 ⅝	194,0
132	2 ½ - 2 ⅞	OSSP132P	OSSP132G	468,5	9 13/16	10 23/32	9 29/32	2 29/32	4 13/16	5	2 7/16	275,6
135	2 ¾ - 2 ⅞	OSSP135P	OSSP135G	551,2	11	11	10 ½	3 ⅝	5	5 7/32	2 29/32	357,1
138	3 - 3 ⅛	OSSP138P	OSSP138G	661,4	12	11 ⅝	10 13/16	3 7/16	5 7/32	5 23/32	3	429,9
140	3 ¼ - 3 ⅝	OSSP140P	OSSP140G	771,6	13	11 23/32	11 ⅝	3 ⅝	5 ½	6 ⅝	3 ⅝	493,8
142	3 ½ - 3 ⅞	OSSP142P	OSSP142G	826,7	14	12 ½	12 7/32	3 29/32	6	6 23/32	3 ⅝	617,3
144	3 ¾ - 4	OSSP144P	OSSP144G	1047,2	15	13 ½	13 29/32	4 ⅝	7	7 ½	3 ½	833,3
146	4 ½	OSSP146P	OSSP146G	1322,8	18 ⅝	18 29/32	16 29/32	4 29/32	7 ½	8 7/32	4	1243,4
150	5	OSSP150P	OSSP150G	1543,2	19 23/32	19 23/32	21 23/32	5 7/16	9 13/16	8 ⅝	4 23/32	2032,7
160	5 ½ - 6	OSSP160P	OSSP160G	2204,6	22 13/16	19 23/32	23 7/32	6 ⅝	10 13/16	9 ⅝	5 ½	2855,0
170	6 ½	OSSP170P	OSSP170G	2755,8	26 ⅝	23 ⅝	25 7/32	6 29/32	11 7/16	12 7/32	6 ⅝	4299,0