



HEAVY TYPE SNATCHBLOCK

Material	:	Mild steel
Safety Factor	:	4 times
Finish	:	Painted
Temperature Range	:	-4°F up to 356°F
Standard Certification	:	Certificate of Conformity Proofload Certificate





Sheaves with roller bearing on request.



Groove size can be modified on request for customized rope sizes.



Available with shackle

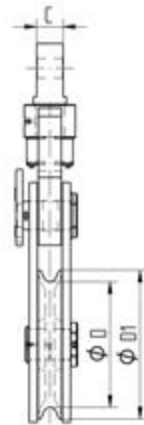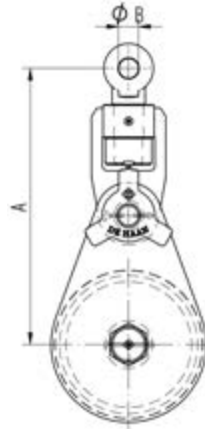

Type	SWL	Rope size	Line pull	Suitable for Shackle	A	ØB	C	ØD	ØD1	Weight
	USt	inch	USt		inch					lbs
H43106	18,7	¾ - 1	9,4	18,7	19 ⅞	1 ⅜	2 ⅞	4 ⅞	5 ⅜	108,0
H43108	27,6	1 - 1 ¼	13,8	27,6	23 ⅜	2 ⅞	2 ⅞	5 ⅜	7 ⅜	172,0
H43110	27,6	1 ¼ - 1 ½	13,8	27,6	24 ⅜	2 ⅞	2 ⅞	7 ½	9 ⅜	202,8
H43112	27,6	1 ¼ - 1 ½	13,8	27,6	26 ⅞	2 ⅞	2 ⅞	9 ⅞	11 ⅜	246,9
H43114	27,6	1 ¼ - 1 ½	13,8	27,6	27 ⅞	2 ⅞	2 ⅞	11 ⅞	13 ⅜	280,0
H43118	38,6	1 ½ - 1 ¾	19,3	38,6	32 ⅜	2 ⅞	3 ⅞	15	17 ⅜	469,6
H43120	38,6	1 ½ - 1 ¾	19,3	38,6	34	2 ⅞	3 ⅞	16 ⅜	19 ⅜	535,7
H43124	38,6	1 ½ - 1 ¾	19,3	38,6	36 ⅞	2 ⅞	3 ⅞	21 ⅞	23 ⅜	679,0
H43224	60,6	1 ½ - 1 ⅞	30,3	60,6	40 ⅜	2 ⅞	3 ⅞	20 ½	23 ⅜	989,9
H43230	93,7	1 ¾ - 1 ⅞	46,8	93,7	47 ⅜	3 ⅞	4 ⅞	24 ⅞	29 ½	2067,9
H43234	132,3	2 - 2 ⅞	66,1	132,3	52 ⅞	3 ⅞	5 ½	29 ⅞	33 ⅜	2907,9
H43236	165,3	2 ⅞ - 2 ¾	82,7	165,3	56 ⅞	4 ⅞	6 ⅞	29 ⅜	35 ⅞	3527,4
H43242	220,5	3 - 3 ⅞	110,2	220,5	64 ⅞	5 ⅞	6 ⅞	34 ⅞	41 ⅜	5037,6
H43246	275,6	3 ½ - 3 ⅞	137,8	275,6	70 ⅞	5 ⅞	7 ½	38 ⅞	46 ⅞	6646,9