



LIGHT TYPE SNATCHBLOCK WITH SAFETY WINDOW

Material	:	Mild steel
Safety Factor	:	4 times
Finish	:	Painted
Temperature Range	:	-4°F up to 356°F
Standard Certification	:	Certificate of Conformity Proofload Certificate




Sheaves with roller bearing on request.



Groove size can be modified on request for customized rope sizes.



Available with shackle

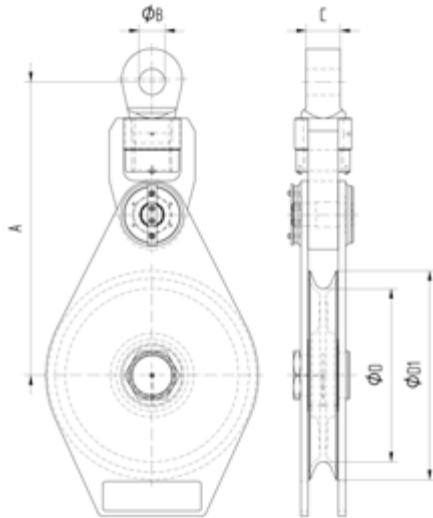

Type	WLL	Rope size	Line pull	Suitable for Shackle	A	ØB	C	ØD	ØD1	Weight
	USt	inch	USt		inch					lbs
SH43106	18,7	¾ - 1	9,4	18,7	15 7/32	1 23/32	2 7/32	4 1/16	5 9/16	72,8
SH43110	27,6	1 1/8 - 1 1/4	13,8	27,6	19 23/32	2 1/8	2 13/16	6 1/16	9 5/8	154,3
SH43118	38,6	1 1/4 - 1 1/2	19,3	38,6	26 13/16	2 7/16	3 1/8	15	17 23/32	352,7
SH43224	60,6	1 1/2 - 1 11/16	30,3	60,6	33 1/2	2 29/32	3 23/32	20 1/2	23 13/16	573,2
SH43230	93,7	1 3/4 - 1 29/32	46,8	93,7	40 7/32	3 1/16	4 23/32	25 7/32	29 29/32	1067,0
SH43234	132,3	2 - 2 3/16	66,1	132,3	46 29/32	3 29/32	5 1/2	29 1/8	33 29/32	1631,4
SH43236	165,3	2 3/8 - 2 3/4	82,7	165,3	52	4 7/16	6 1/16	29 29/32	35 13/16	2187,0
SH43242	220,5	3 - 3 3/8	110,2	220,5	58 23/32	5 1/16	6 23/32	34 7/16	41 23/32	3467,9
SH43246	275,6	3 1/2 - 3 11/16	137,8	275,6	64 13/16	5 23/32	7 1/2	38 7/32	46 1/8	4623,1