

LIGHT TYPE SNATCHBLOCK WITH SAFETY WINDOW



Material	:	Mild steel
Safety Factor	:	4 times
Finish	:	Painted
Temperature Range	:	-20 °C up to +180 °C
Standard Certification	:	Certificate of Conformity Proofload Certificate




Sheaves with roller bearing on request.



Groove size can be modified on request for customized rope sizes.



Available with shackle

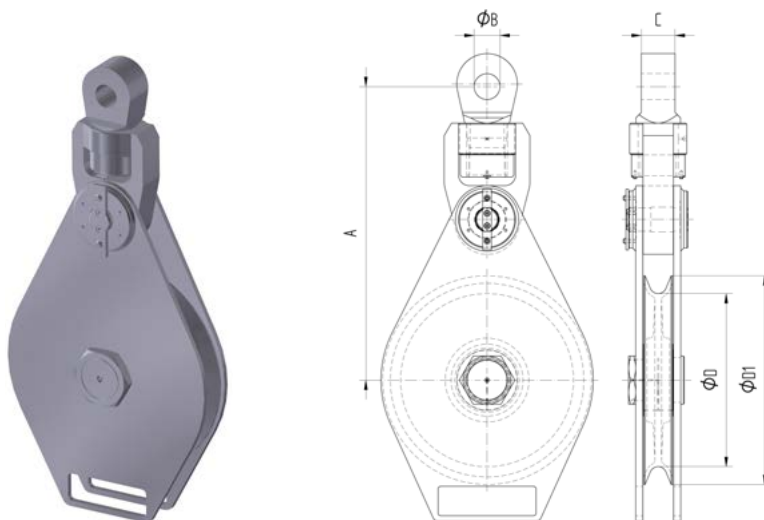

Type	WLL	Rope size	Line pull	Suitable for Shackle	A	ØB	C	ØD	ØD1	Weight
	tons	mm	tons		mm					kg ±
SH43106	17	22 - 25	8.5	17	385	44	55	110	150	33
SH43110	25	28 - 32	12.5	25	500	53	70	160	250	70
SH43118	35	32 - 38	17.5	35	680	60	80	380	450	160
SH43224	55	38 - 42	27.5	55	850	73	100	520	605	260
SH43230	85	44 - 48	42.5	85	1020	85	120	640	760	484
SH43234	120	50 - 55	60	120	1190	100	140	740	860	740
SH43236	150	60 - 70	75	150	1320	113	160	760	910	992
SH43242	200	75 - 85	100	200	1490	135	170	870	1060	1573
SH43246	250	88 - 93	125	250	1645	145	190	970	1170	2097