

CLOSED BODY SWIVEL EYE JAW




Material	:	High tensile steel
Safety Factor	:	5 times SWL
Finish	:	Painted
Temperature Range	:	-4°F up to 356°F
Standard Certification	:	Certificate of Conformity Proof Load Certificate



Upon request also available for underwater use.

Non-standard sizes or custom products available on request.

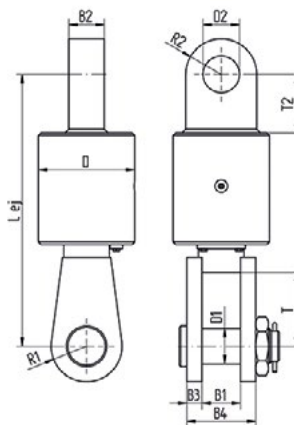

SWL	Art. nr.	B1	B2	B3	B4	D1	D2	D	Lej	R1	R2	T	T2	Weight
USt	painted	inch												lbs
18,7	CBS017EJ	2 ½	2 ½	1 ½	4 1/16	2 ½	2 ½	6 3/32	18 29/32	2 1/16	2 1/16	5 ½	½	121,3
27,6	CBS025EJ	3	2 13/16	1 ½	5 7/16	2 13/16	2 13/16	7 ½	21 ½	2 13/16	2 13/16	5 23/32	4 ½	169,8
38,6	CBS035EJ	3 ½	3 ½	1 ¾	6 23/32	3 ½	3 ½	9 13/16	25 7/16	3 ½	3 ½	6 23/32	5 ½	343,9
60,6	CBS055EJ	4 ¾	3 29/32	2	8 3/16	3 29/32	4 ½	10 ¾	30 29/32	4 ½	4 ½	6 29/32	6 ¾	560,0
77,2	CBS070EJ	4 ¾	3 29/32	2 ½	8 23/32	4 ¾	4 ¾	11 7/16	31 29/32	4 ½	4 ½	6 29/32	6 29/32	606,3
93,7	CBS085EJ	5 ½	4 23/32	3	11	5	5 ½	13 13/16	33 13/16	5 ½	5 ½	6 29/32	7 ½	987,7
132,3	CBS120EJ	6 ¾	5 ½	3 ½	13 7/32	6	6 ¾	16 29/32	36 7/16	6 29/32	6 29/32	7 ½	8 29/32	1618,2
165,3	CBS150EJ	6 23/32	6 ¾	3 29/32	14 ¾	7	7 ¾	18 ½	40 29/32	7 ½	7 ½	8 ¾	9 ¾	2182,6
220,5	CBS200EJ	7 ½	6 23/32	4 ¾	16 ¾	7 ½	7 ¾	20 29/32	46 ½	8 23/32	8 23/32	9 13/16	11	3139,4
275,6	CBS250EJ	8 ¾	7 ½	4 29/32	17 23/32	9 13/16	10	23 ¾	51 ¼	10 7/32	10 7/32	11	13 7/16	4607,7
330,7	CBS300EJ	9 13/16	7 ½	6 29/32	23 ¾	11 7/16	11 ½	29 ½	56 23/32	11 13/16	11 13/16	11 13/16	15 7/16	7579,5